


Industrial Solutions

High performance cables for Industrial applications



- Very high resistance to temperature (up to +155 °C)
- Electron-Beam cross-linked
- increased thermal pressure resistance (short-circuit protection)
- Very long service life (220 000 h at 90 °C, 20 000 h at 125 °C)
- Aging resistant
- Excellent fire safety properties
- Halogen-free
- Resistant to media
- Resistant to UV
- Numerous approvals available (More information in our datasheets)

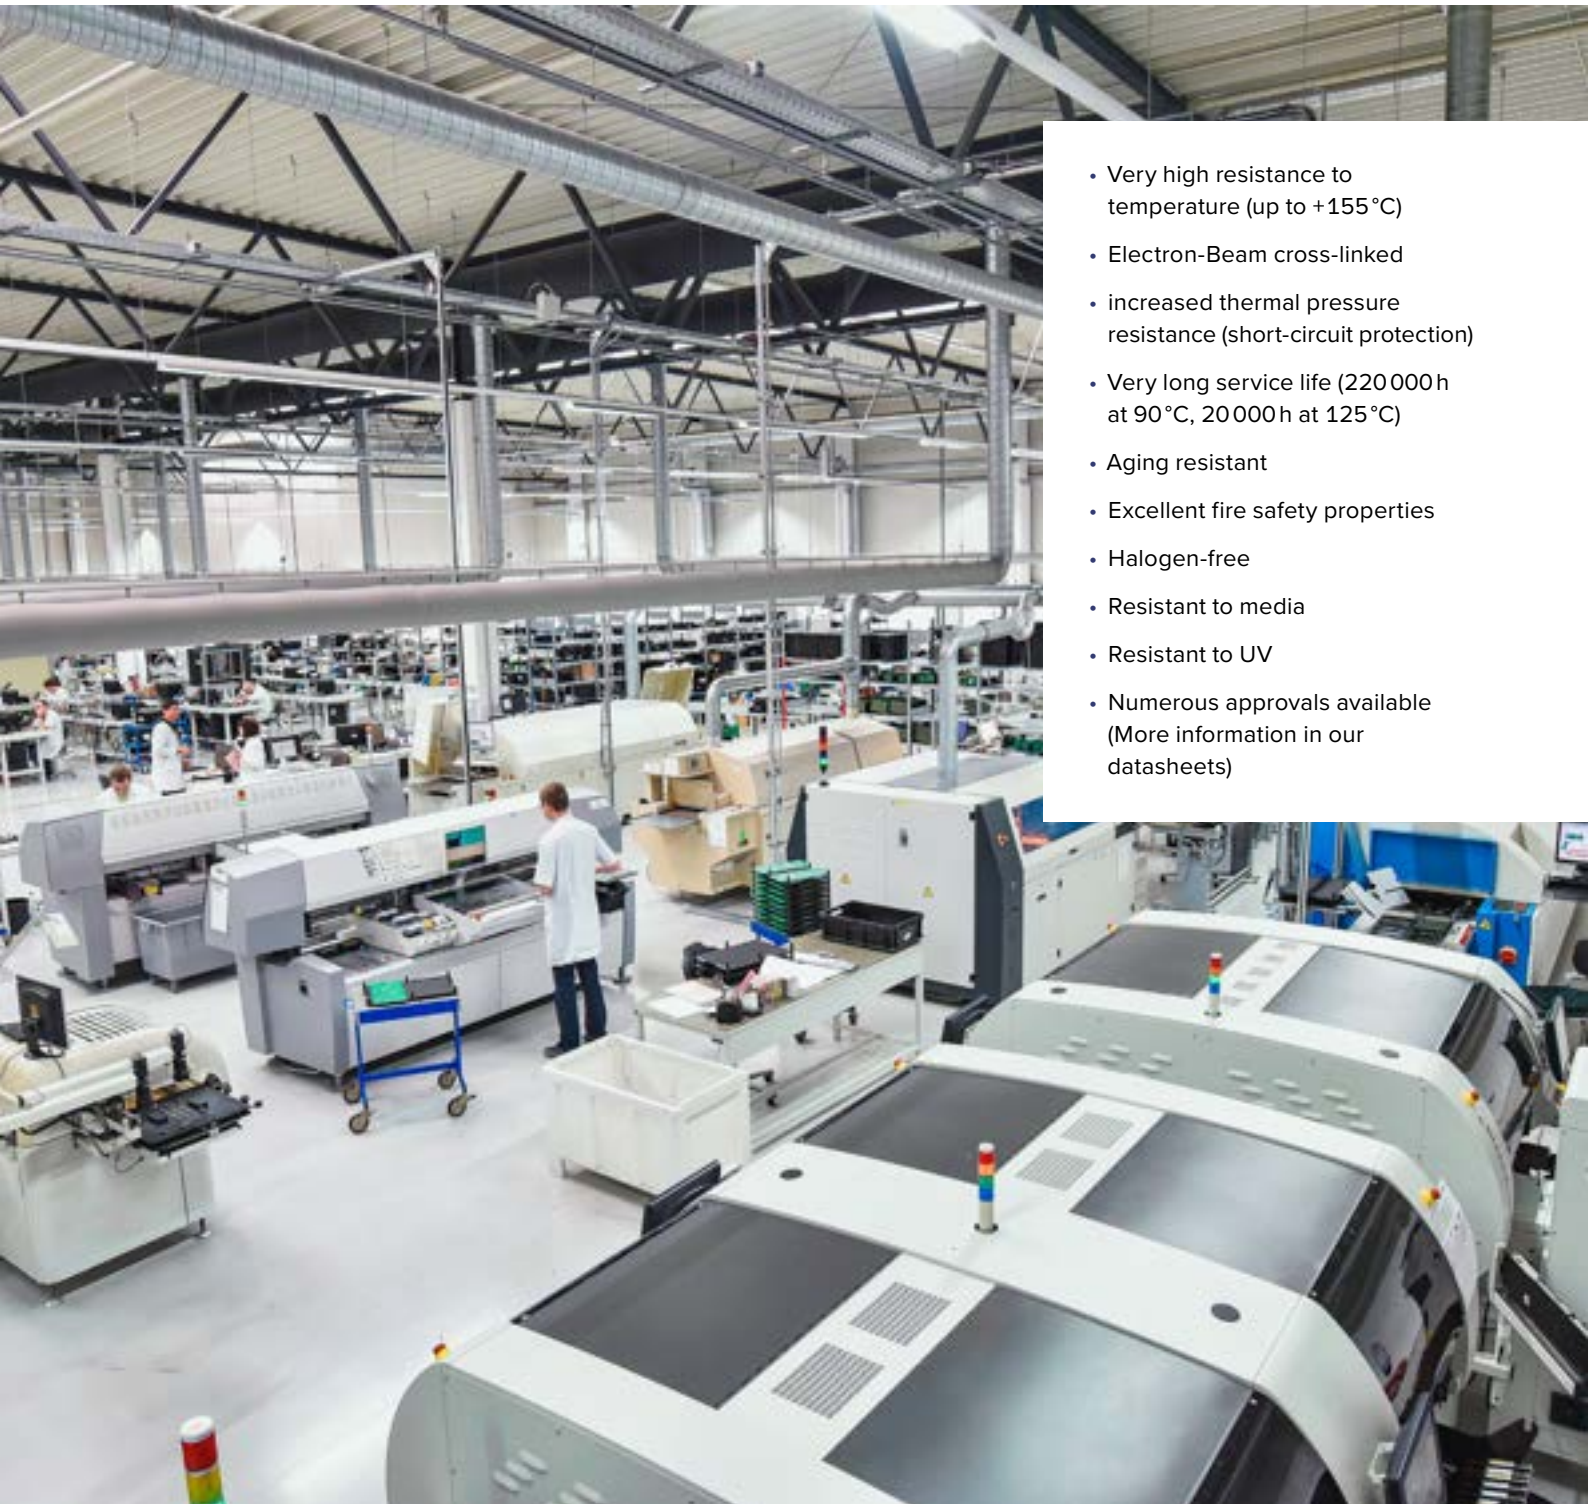

Single-core cables

	Voltage	Temperature range	Cross-section	Approvals
BETAtherm® 90	600/1000 V	-40 up to 105 °C	From 1 mm ² to 240 mm ²	VDE, ESTI, CPR
BETAtherm® 145	600/1000 V	-55 up to 145 °C	From 1 mm ² to 300 mm ²	VDE, DNV/GL, Lloyd's Register, BUREAU VERITAS, CPR
BETAtherm® 155	600 V	-55 up to 155 °C	From 1 mm ² to 150 mm ²	


Multi-core cables

	Voltage	Temperature range	Cross-section	Approvals
BETAflam® 145 flex	600/1000 V	-55 up to 145 °C	From 2 × 0,5 mm ² to 5 × 95 mm ²	DNV/GL, Lloyd's Register, BUREAU VERITAS, CPR
ROFLEX	600/1000 V	-55 up to 90 °C	From 2 × 1 mm ² to 5G70, 1 × 50 mm ² to 1 × 240 mm ²	ESTI (CH-N1BQ-F)

FELTEN Wire & Cable Solutions BV

Habraken 2401
5507 TM Veldhoven
The Netherlands

www.feltenwcs.com
email: sales@feltenwcs.com
phone: +31(0)40-8200950

 Follow us on LinkedIn

[Contact us](#)

Shielded cables

	Voltage	Temperature range	Cross-section	Approvals
BETA flam® 145 C-flex	600 / 1000 V	-55 up to 145 °C	From 2 × 0.5 mm ² to 5 × 35 mm ²	DNV/GL, Lloyds Register, BUREAU VERITAS, CPR

UL approved single core and cables

	Voltage	Temperature range	Cross-section	Approvals
BETA therm® 145 UL/CSA 3266	300 V	-55 up to 145 °C	From AWG24 to AWG12	UL, CSA
BETA therm® 145 UL/CSA/cUL/ 3271/3820	1000 V	-55 up to 145 °C	From 1 mm ² to 240 mm ²	UL, CSA, cUL
BETA therm® 155 UL/cUL 3289	600 V	-55 up to 155 °C	From 1 mm ² to 120 mm ²	UL, cUL
BETA flam® 145 flex UL/cUL AWM 4486	1000 V	-55 up to 145 °C	From 2 × 0.5 mm ² to 5 × 95 mm ²	UL, cUL
BETA flam® 145 C-flex UL/cUL AWM 4486	1000 V	-55 up to 145 °C	From 2 × 0.5 mm ² to 5 × 35 mm ²	UL, cUL

You can find more information in our data sheets, which can be downloaded from our website.

Thanks to the various approvals, a wide range of applications is guaranteed for the core conductors and cables. The high quality of our single core cables is guaranteed with VDE, UL, cUL and CSA certification (details can be found in our data sheets).


Our flexible single core cables **BETA**therm® 90 and **BETA**therm® 145 are tested according to Construction Products Regulation (CPR). For multi-core cables, we offer **BETA**flam® 145 flex and C-flex, which meet the current safety requirements for use in buildings.



FELTEN Wire & Cable Solutions BV

Habraken 2401
5507 TM Veldhoven
The Netherlands

www.feltenwcs.com
email: sales@feltenwcs.com
phone: +31(0)40-8200950

 Follow us on LinkedIn

[Contact us](#)

Safety and availability are now increasingly important factors for technical installations. Legislation is also being tightened in the areas of fire prevention and adequate protection against the consequences of fire. A key contribution to fire prevention in electrical installations is offered by using cross-linked insulation materials, which increases the operational safety, even in the case of a short circuit. Our **BETAflam**[®] and **BETAtherm**[®] cables are designed specifically to meet these requirements.

For the highest level of product safety and quality, we rely on the use of state-of-the-art production facilities. In our laboratories, we continuously work on the development of new and innovative polymer compounds that are used for the production of our cables. This allows us to achieve excellent insulation properties, improved performance within temperature tolerances, longer life-span, easier handling, and additional safety features.

Applications:

- Electrical cabinets
- Switchgears
- Machinery construction
- Cable harnessing
- Stranded wires for winding goods
- Installation
- Switching technology
- Control and automation
- Ships & Offshore

