


Part No.: **84950478# 000ZGELO**

FiberConnect® AT-V(ZN)H(ZN)H n ...

Profile view:

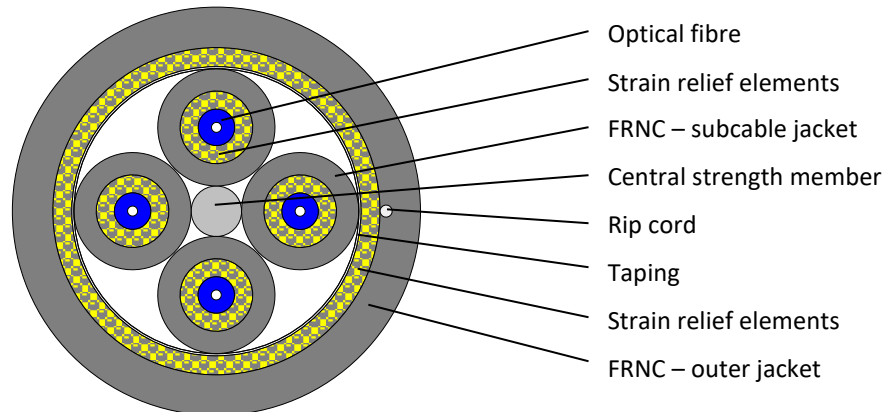

Design:

Subcable:

- Semi-tight buffered fibre, outer diameter 0.9 mm
colour: yellow (E9/125), green (G50/125), blue (G62.5/125)
- Strain relief elements (aramid)
- Subcable-jacket, halogen-free and flame-retardant material
with approx. 0.5 mm wall, colour: black
- Diameter 2.9 mm with numeric coding

Stranding:

- FRP-element in centre, break-out-subcables stranded in
layers (number of fibres 2-12)

Strain relief:

- Aramid yarns, wrapped in two layers (left and right spin)

Cable jacket:

- Halogen-free and flame-retardant material FRNC (SHF1, IEC 60092 Part 360)
- Outer diameter and wall see table below
- Colour: black
- Inkjet-marking white:
WEINERT - FiberConnect® DNV GL AT-V(ZN)H(ZN)H n *fibre type* , *buffer type*
(alternating current symbol twice) - IEC 60332-3-24 -
(order number), (sequential length in metres)

Part No.: **84950478# 000ZGEL0**

Application/Installation:

- Rugged cable for the application in heavy ambiance
- Indoor cable for the installation in cable ducts and in tubes
- For direct connector assembly

Transmission characteristics:

- Transmission characteristics see separate fibre data-sheet

Mechanical characteristics:

- Min. bending radius acc. to IEC 60794-1-2, G1
 - static 10 x outside diameter
 - dynamic 15 x outside diameter
- Max. crush resistance acc. to IEC 60794-1-2, E3
 - short term 4000 N/dm
 - long term 1000 N/dm
- Impact strength acc. to IEC 60794-1-2, E4 (radius 300 mm, 30 cycles/minutes, 10 cycles)
 - 2 Nm
- Max. pulling force acc. to IEC 60794-1-2, E1 1200 N

Thermal characteristics:

- Transport and storage - 25 °C to + 80 °C
- Installation - 5 °C to + 50 °C
- In use (acc. to IEC 60794-1-2, F1) - 20 °C to + 80 °C

Fire performance:

- Flame retardancy acc. to IEC 60332-1-2 and to IEC 60332-3-24 Cat. C
- Smoke density acc. to IEC 61034
- Halogen- free acc. to IEC 60754-1
- Acidity of combustion gases acc. to IEC 60754-2
- No corrosive and toxic fumes

Chemical characteristics:

- Oil resistance acc. to IEC 60811-2-1 with test-oil IRM 902 (acc. to ISO 1817) at +70°C; 4 h; pulling rate 50 mm/min relative change of the elongation at break and tensile strength max. +/- 40 %
- UV-resistance only at black outer jacket

Standardisation:

- Based on IEC 60794-2
- DNV-GL Type Approval Certificate No. TAE0000152

Part No.: **84950478# 000ZGEL0**

Notes:

- Packaging:
Disposable drums

Part No.:	No. of Fibres	Outer diam. in mm	Wall thickness in mm	Weight in kg/km	Fire load in MJ/m	Zugkraft max. in N
84950481#	2	10.1	1.0	85	1.48	1200
84950478#	4	10.1	1.0	85	1.48	1200
84950482#	6	11.8	1.0	120	2.01	1200
84950483#	8	13.6	1.0	155	2.79	1200
84950484#	10	15.6	1.1	185	3.31	1200
84950485#	12	17.4	1.1	270	4.65	1200

Disclaimer:

FELTEN Wire and Cable Solutions BV reserves the right to make changes to the product described in this specification without prior notice. FELTEN does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.