


Part No.: **84A00100S**

FiberConnect® V-2Y 1P980/1000

Profile view:

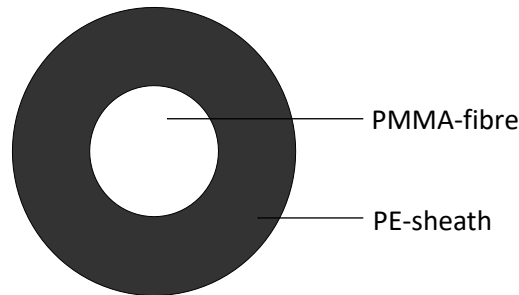

Design:

Fibre:

- Fibre of polymethylmethacrylate (PMMA); 980/1000 µm step index profile with fluoropolymere cladding (POF), diameter 1.0 mm

Sheath:

- Polyethylene (PE), nominal diameter: 2.2 mm colour: black

Application/Installation:

- For applications with a simple mechanical demand
- For direct connector assembly

Transmission characteristics:

- Attenuation (at TR = 20 °C)

at 650 nm (Laser)	< 160 dB/km
at 660 nm (LED)	< 230 dB/km
- Bandwidth

at 650 nm using RML	> 40 MHz x 100 m
---------------------	------------------
- Numerical aperture

	0.485 +/- 0.045
--	-----------------

Mechanical characteristics:

- Min. bending radius

dynamic	25mm
static	25 mm
- Pull force max.

short-term	15N
long-term	5 N
- Crush resistance max.

short-term	300 N/dm
long-term	40 N/dm

Part No.: **84A00100S**

- Repeated bending 10.000 cycles
- Weight approx. 3,8 kg/km

Thermal characteristics:

- Transport and storage - 55 °C to + 85 °C
- Installation - 5 °C to + 50 °C
- During operation - 55 °C to + 85 °C

Fire performance:

- Halogen-free

Chemical characteristics:

- Resistance to oil, petrol, acid and leach

Standardisation:

- Multimode fibres category A4a.2 IEC 60793-2-40
- IEC 60794-2-41

Notes:

- Packaging:
500 m coils

FELTEN Wire and Cable Solutions BV reserves the right to make changes to the product described in this specification without prior notice. FELTEN does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.