


Part No.: **84Q04700T**

FiberConnect® AT-V(ZN)Y11Y 2K200/230

Profile view:

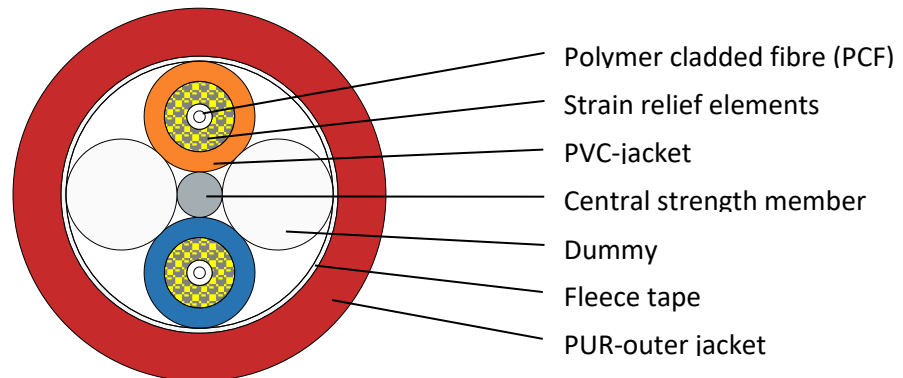

Design:

Single element:

- Polymer cladded optical fibre 200/230 µm (step index) with Tefzel buffer (ETFE), buffer diameter: approx. 0.5 mm
- Strain relief elements: aramid
- Jacket: Polyvinylchloride (PVC) wall thickness approx. 0.4 mm, colours: orange und blue
- Diameter: nominal 2.2 mm

Stranding:

- Central strength member (FRP) two breakout subcables and two dummies stranded in one layer
- Fleece tape

Cable jacket:

- Polyurethane (TPE-U), wall thickness nominal 1.0 mm colour: red
- Over all diameter: nominal 7.4 mm
- Inkjet-marking (black): AT-V(ZN)Y11Y 2K200/230 10A17 / 8B20 (Order No.), (Reel No.), (sequential length in metres)

Application/Installation:

- FO- cable for harsh industrial environment
- Break-out cable for fixed indoor and outdoor installation in cable ducts, on cable trays or in cable conduits
- For direct connector assembly
- Drag chain suitable

Part No.: **84Q04700T**

Transmission characteristics:

- Attenuation (at room temperature approx. 20°C)
 - at 650 nm < 10 dB/km
 - at 850 nm < 8 dB/km
- Bandwidth
 - at 650 nm > 17 MHz x km
 - at 850 nm > 20 MHz x km
- Numerical aperture 0.37

Fibre characteristics:

- Fibre temperature application - 65 °C to + 125 °C
- Proof-Test ≥ 150 kpsi

Mechanical characteristics:

- min. bending radius
 - dynamic 110 mm
 - static 70 mm
- Pull force, max.
 - dynamic 800 N
 - static 200 N
- Crush resistance, max.
 - short-term 4000 N/dm
 - long-term 1000 N/dm
- Torsion in according to IEC 60794-1-2, E7
 - temperature:- 40°C
 - torsion length:1 m
 - rotation: ± 144 °
 - cycle:100
 - tensile force:100N
- Weight approx. 45 kg/km

Thermal characteristics:

- Transport and storage - 40 °C to + 85 °C
- Installation - 20 °C to + 60 °C
- During operation - 40 °C to + 85 °C

Fire performance:

- Cable is flame retardant

Chemical characteristics:

- Very good resistance against oil, petrol, acid and leach
- UV-resistance of outer-jacket in according to DIN EN ISO 4892-2, Procedure A, UV-application 500 hours

Part No.: **84Q04700T**

Standardisation:

- Multimode fibres category A3e
IEC 60793-2-30
- IEC 60794-2
- DIN VDE 0888-Part 6

Notes:

- Packaging:
Non-returnable reel

Disclaimer:

FELTEN Wire and Cable Solutions BV reserves the right to make changes to the product described in this specification without prior notice. FELTEN does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.