


Profibus SeaLine

Cable type: 02YSH(ST)CH 1X2X0.75/2.55-150 LI VI FRNC

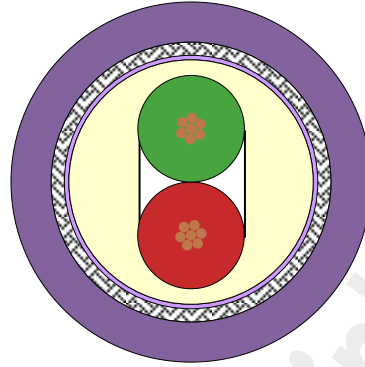

Design

Wire

Stranded bare copper wire 7 X 0.25 (22 AWG) (0.34mm²)
Insulation of foamed Polyethylene (PE) with skin

∅ 0.76 mm (0,030 in)
∅ 2.55 mm (0,100 in)

Core

2 wires, RD and GN twisted
Plastic tape, overlapped
Inner-Jacket: Thermoplastic copolymer (FRNC)
Alulaminat foil overlapped, applied longitudinally
Shield braiding of tinned copper wires 0.15 mm dia (35 AWG)
Coverage about 85%

∅ 5.5 mm (0,217 in)
∅ 6.2 mm (0,244 in)

Jacket

Thermoplastic copolymer (FRNC) VT
Wall thickness about 0.9 mm

∅ (8.0 ± 0.4) mm (0.315 ± 0.016 in)

Printing: "sequential length in metres" BizLink **SeaLine** SCG Profibus * L45467-G17-C46 * 02YSH(ST)CH
1X2X0.75/2.55-150 LI FRNC * IEC 60332-3-22 * "internal lot number"

Electrical data at 20°C

Loop resistance	≤ 110	Ohm/km
Insulation resistance	≥ 16000	MOhm*km

Characteristic Impedance

3 - 20 MHz	(150 ± 15)	Ohm
31.25 - 38.4 kHz	(185 ± 18.5)	Ohm
9.6 kHz	(270 ± 27)	Ohm

CONFIDENTIAL: This document and its content must be treated strictly confidentially and are property of BizLink Special Cables Germany GmbH

Attenuation

	16 MHz	<	42 dB/km
	4 MHz	<	22 dB/km
	38.4 kHz	<	4 dB/km
	9.6 kHz	<	2.5 dB/km
Capacitance	1 kHz	≈	28.5 nF/km
Capacitance unbalance to ground		≤	1500 pF/km
Operating voltage		≤	60 V
Test voltage (wire/wire/screen rms 50Hz 1min)			1000 V

Mechanical and thermal characteristics

Conductor material acc. to DIN EN 13602 Cu-ETP-A...
 Screen material acc. to DIN EN 13602 Cu-ETP-A...-B
 Insulating material acc. to DIN EN 50290-2-23 (VDE 0819), table 2/A (HD 624.3) (02Y)
 Jacket material acc. to IEC 60092-360 (IEC 60092-359) SHF1
 Flame retardant acc. to IEC 60332-1-2
 Oil resistant acc. to IEC 60811-404 (4 hours / 70°C)

Approved for Marine and Offshore Applications

DNV	Certificate No. TAE000025V
Lloyds Register	Certificate No. 07/20047
Bureau Veritas	Certificate No. 20147/C0 BV
ABS	Certificate No. 16-HG1512868-PDA

Other characteristics

Flame retardant acc. to IEC 60332-3-22 (Cat. A/F)
 Halogen free acc. IEC 60754-1
 Smoke-density acc. to IEC 61034
 RoHS compliant (Directive 2011/65/EU & 2015/863/EU RoHS 3)
 UV-resistant

Permissible temperature range : -25 °C (-13 °F) up to 80 °C (176 °F)
 Min. bending radius allowed : repeated 10X ø, single 5X ø
 Weight about : 84 Kg/km (56 lb/1000ft)

Designation of order

L45467-G17-C46
 211958
 02YSH(ST)CH 1X2X0.75/2.55-150 LI VI FRNC
 1000 m (3281 ft) on non-returnable reel

Product has not been tested and classified according to the CPR (EU/305/2011).
 The product shall not be permanently installed in buildings in the EU.