

MegaLine[®] E5-70 S/F Dca

KS-02YSCH 2x(4x2x0.55 mm/ AWG 23/1) PIMF

Category 6_A

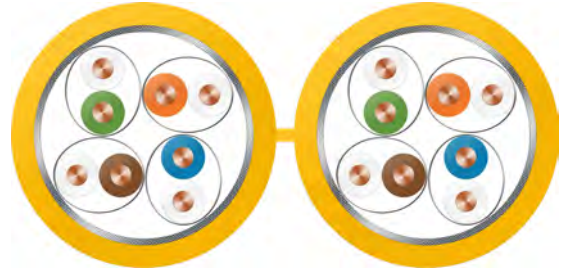


Illustration similar

Construction

Conductor: bare copper wire, AWG 23/1
 Insulation: cellular-PE, core-Ø: nominal value 1.4 mm
 Colour code: wh/bl, wh/or, wh/gn, wh/br
 Element: cores to pair
 Pair shielding: aluminium-bonded polyester tape


Twisting: 4 pairs to cable core with tinned copper wire AWG 24/1
 Overall screen: tinned copper wire braid
 Outer sheath: halogen-free compound, shape 8 siamese, 2 base elements in parallel
 Colour: Colza yellow

Cable marking:

KERPEN DATACOM GmbH MegaLine E5-70 S/F 2x4P H 4PPoE Dca s2 d2 a1 DoP: CDESK0000006 Made in Germany \$BA-Nr.\$ \$m-sign. \$

Fire Behaviour


Fire class / DoP: Dca s2 d2 a1 / CDESK0000006
 Fire performance: EN 50575 / EN 50399
 Flame retardancy: acc. to IEC 60332-3-24
 Halogen free: IEC 60754-1/2
 Acidity: IEC 60754-2
 Smoke density: IEC 61034-1/2
 Fire load (approx.): 1.2 MJ/m



Security (fire behaviour)

Performance


better than Category 6A acc. to EN 50288 and IEC 61156
 excellent NEXT, well screen properties (pair- and overall screen), low Skew
 Transmission bandwidth (typ.): 700 MHz



Performance (class, bandwidth)

Applications


Installation cable for generic cabling systems acc. to ISO/IEC 11801 and EN 50173 (2nd edition). Ideal for all applications of class D up to EA up to 10 GbE acc. to IEEE 802.3 an, Cable sharing, VoIP, PoE/PoE+



Application (Ethernet, TV)

Mechanical characteristics (cable)


Bending radius (static) (min.): 4x outer-Ø
 Bending radius (dynamic) (min.): 8x outer-Ø
 Tensile loading (max.): 220 N
 Crush resistance (long term): 1000 N/100mm
 Impact strength (quantity of impacts): 10



Construction (conductor size, tensile strength)

Electromagnetic behaviour

Coupling resistance @ 10 MHz (nom.): 5 mΩ/m
 Screen attenuation (nom.): 60 dB
 Coupling attenuation (nom.): 80 dB
 Segregation class according EN 50174-2: c



EMC (coupling attenuation)

MegaLine[®] E5-70 S/F Dca

KS-02YSCH 2x(4x2x0.55 mm/ AWG 23/1) PIMF

Category 6_A

DC resistance (max.)	82 Ω/km
Insulation resistance (min.)	5 GΩ x km
Operating capacity (approx.)	42 pF/m
Capacitive coupling (e) (approx.)	1100 pF/km
Signal velocity (approx.)	0.8 x c
Phase delay	420 ns/100m
Skew @ 100 MHz (approx.)	7 ns/100m
Characteristic impedance @ 100 MHz	100 +/- 5 Ω
Test voltage	1000 V
Operating voltage (max.)	125 V

Thermal characteristics (cable)

Temperature (transport / storage)	-20 °C up to +60 °C
Temperature during installation	0 °C up to +50 °C
Temperature after installation	-20 °C up to +60 °C

Chemical characteristics

Free of hazardous substances acc. to RoHS 2011/65/EU

Frequenz MHz	Attenuation dB/100m		NEXT dB		PS-NEXT dB		ACR dB@100m		PS-ACR dB@100m		ACR-F dB@100m		PSACR-F dB@100m		RL dB	
	typ.	Cat.6 _A max.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*	typ.	Cat.6 _A min.*
1	1,9	2,1	95	75,3	92	72,3	93	73,2	90	70,2	91	68	88	65	26	20
10	5,2	5,9	90	60,3	87	57,3	85	54,4	82	51,4	96	48	93	45	35,9	25
100	17,7	19,1	75	45,3	72	42,3	57	26,2	54	23,2	90	28	87	25	37,2	20,1
200	26,4	27,6	68	40,8	65	37,8	42	13,2	39	10,2	78	22	75	19	33,1	18
250	29,9	31,1	66	39,3	63	36,3	36	8,3	33	5,3	75	20	72	17	30,5	17,3
300	31,9	34,3	65	38,1	62	35,1	33	3,9	30	,9	72	18,5	69	15,5	29,9	17,3
450	38,9	42,7	63	35,5	60	32,5	24	-7,2	21	-10,2	69	14,9	66	11,9	28,9	17,3
500	41,2	45,3	61	34,8	58	31,8	20	-10,4	17	-13,4	66	14	63	11	28,3	17,3
600	46,2	-	57	-	54	-	11	-	8	-	60	-	57	-	27,2	-
700	51,4	-	54	-	51	-	3	-	0	-	56	-	53	-	26,2	-

* EN 50288-10-1(2013)/EN 50288-5-1(2004)/IEC 61156-5(2009)

Standards, certificates and approvals

Compliance	to CPR (EU/305/2011)
Link Performance:	KERPEN MegaLine [®] systems and further commercial plug-inn connector
Inspection certificate:	acc. to DIN 55350-18-4.2.1 bzw. EN 10204
Conform to CPR (EU/305/2011)	\$CE_Logo\$
Compliant with LVD (2014/35/EU)	\$CE_Logo\$

Part number	Weight	copper weight:	Weight	Cable dimensions (W x H)	Colour
LKD7KS600250000	112 kg/km	60 kg/km	112 kg/km	15 x 7.4	Colza yellow