

MegaLine[®] F6-90 S/F FCA

KS-02YSC2Y 4 x 2 x AWG 23/1 PIMF

Category 7 **S₀ P₃ A₄ C₄ E₅**

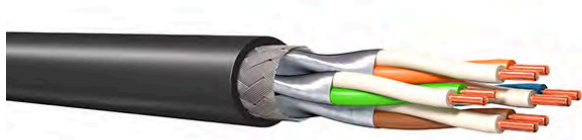


Illustration similar

Construction


Conductor	bare copper wire, 0.58 mm	Twisting	4 pairs
Insulation	cellular-PE, Core-Ø: nominal value 1.40 mm	Overall screen	tinned copper wire braid
Colour code	WH/BU, WH/OG, WH/GN, WH/BN	Outer sheath	Polyethylene, UV resistant
Element	cores to pair	Colour	Jet black
Pair shielding	aluminium-bonded polyester tape		

Cable marking

KERPEN DATACOM Made in Germany MegaLine F6-90 S/F 4P PE Heavy Duty Cat.7 1000MHz 4PPoE 90W \$BA-Nr.\$ \$m-sign.\$


Fire Behaviour

Fire class / DoP	FCA /
Halogen-free	IEC 60754-1/2
Smoke density	IEC 61034-2
Fire load (approx.)	1.57 MJ/m

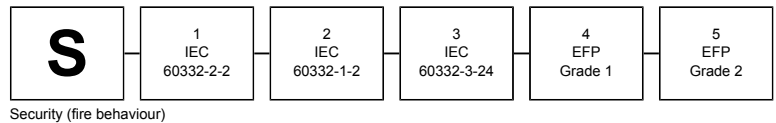


Performance

better than Category 7 acc. to EN 50288 and IEC 61156
 excellent NEXT, exzellente screen properties (pair- and overall
 screen), low Skew
 Bandwidth (max.) 900 MHz

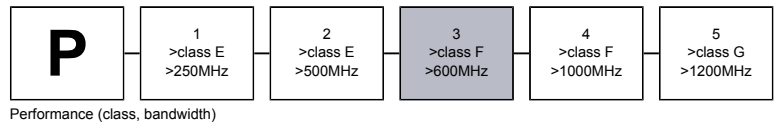


Applications

Installation cable for generic cabling systems acc. to ISO/IEC 11801 and EN 50173 (3rd edition) and also acc. to ISO/IEC 24702 and EN 50173-3. Ideal for all applications of class D up to F Multimedia (Video, Data, Voice) >10 GbE acc. to IEEE 802.3 an, Cable sharing, VoIP, PoE/PoE+/4PPoE. For outdoor application and direct burial.

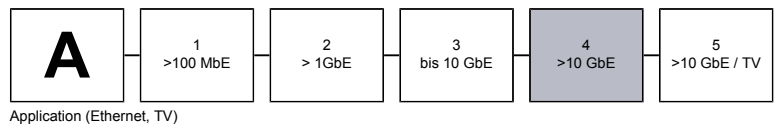


Mechanical characteristics (cable)

Bending radius (static) (min.)	4x outer-Ø
Bending radius (dynamic) (min.)	8x outer-Ø
Max. strain relief	110 N
Crush resistance (long term)	2000 N/100mm
Impact strength (quantity of impacts)	20

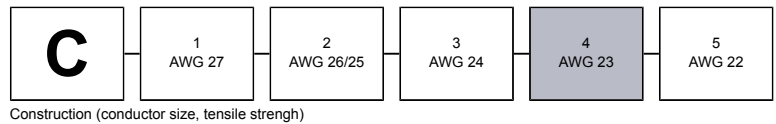

Electromagnetic behaviour

Coupling resistance @ 10 MHz (nom.)	5 mΩ/m
Screen attenuation (nom.)	70 dB
Coupling attenuation (nom.)	85 dB
Segregation class according to EN 50174-2	d

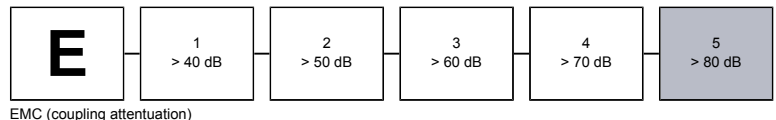

MegaLine[®] F6-90 S/F FCA

KS-02YSC2Y 4 x 2 x AWG 23/1 PIMF

Category 7 **S₀ P₃ A₄ C₄ E₅**

Electrical properties at 20°C

DC resistance (max.)	75 Ω/km
Insulation resistance (min.)	5 GΩ x km
Operating capacity (approx.)	42 pF/m
Capacitive coupling (e) (approx.)	1100 pF/km
Signal velocity (approx.)	0.79 x c
Phase delay	420 ns/100m
Skew @ 100 MHz (approx.)	5 ns/100m
Characteristic impedance @ 100 MHz	100 +/- 5 Ω
Test voltage	1000 V
Operating voltage (max.)	125 V

Thermal characteristics (cable)

Temperature (transport / storage)	-20 °C up to +60 °C
Temperature during installation	-10 °C up to +50 °C
Temperature after installation	-25 °C up to +70 °C

Chemical characteristics

Conform to RoHS and REACH

Frequenz MHz	Attenuation dB/100m		NEXT dB		PSNEXT dB		ACR-N dB@100m		PSACR-N dB@100m		ACR-F dB@100m		PSACR-F dB@100m		RL dB	
	typ.	Cat.7 max.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*	typ.	Cat.7 min.*
1	1,9	2,0	102	80	99	77	101	78,0	98	75,0	109	80	106	77	25,4	-
10	4,8	5,7	102	80	99	77	98	74,3	95	71,3	108	74	105	71	31,1	25,0
100	16,4	18,5	102	72	99	69	86	53,5	83	50,5	93	54	90	51	33,2	20,1
200	24,5	26,8	102	68	99	65	78	41,2	75	38,2	85	48	82	45	33,2	18,0
250	27,8	30,2	102	66	99	63	75	35,8	72	32,8	82	46	79	43	33,4	17,3
450	36,1	41,6	97	63	94	60	61	21,4	58	18,4	72	41	69	38	31,4	17,3
500	38,2	44,1	97	62	94	59	59	17,9	56	14,9	68	40	65	37	30,5	17,3
600	42,9	48,9	92	61	89	58	49	12,1	46	9,1	62	38	59	35	27,6	17,3
700	47,7	-	92	-	89	-	44	-	41	-	59	-	56	-	26,2	-
800	50,8	-	90	-	87	-	39	-	36	-	56	-	53	-	23,9	-
900	55,1	-	85	-	82	-	30	-	27	-	52	-	49	-	21,7	-
1000	58,0	-	80	-	77	-	22	-	19	-	42	-	39	-	18,0	-

* EN 50288-4-1(2014) / IEC 61156-5(2020)

Standards, certificates and approvals

Conformity	to CPR (EU/305/2011) acc. to LVD (2014/35/EU)
Quality seal with production control	GHMT PVP
Link Performance	KERPEN DATACOM MegaLine [®] systems and further commercial plug-in connector
Inspection certificate	acc. to DIN 55350-18-4.2.1 bzw. EN 10204

Part number	Weight	Copper weight	Outer Ø approx.	Colour
LKD7KS701690000	64 kg/km	35 kg/km	8.6 mm	Jet black

FELTEN Wire and Cable Solutions BV reserves the right to make changes to the product described in this specification without prior notice. FELTEN does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.